



GEEPLUS

Super Stroke Solenoid M320SS-XXV


Device drawn in energised condition

Life Expectancy >2M cycles


Leadwires UL1430, 22AWG

Plunger Mass 69 grammes

Mass 355 grammes

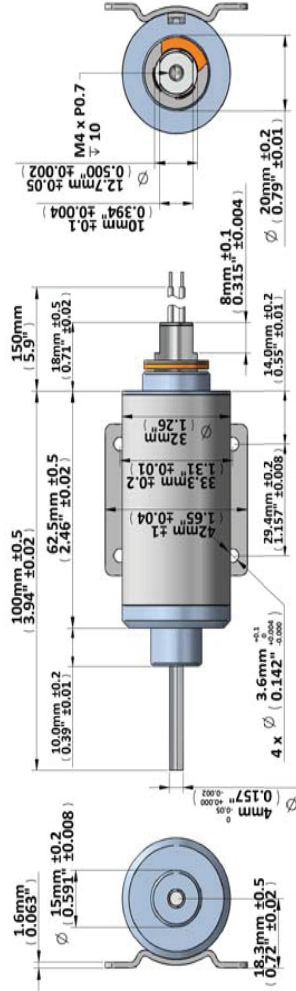

force / stroke M320SS

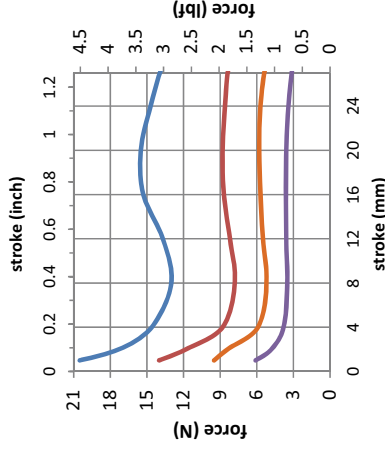


Data at 20°C, device performance measured without heat sink

AWG no.	resistance		number of turns	volts DC			
	Ω±10% (at 20°C)	Ω±10%		100% cont.	50% or less	25% or less	10% or less
M320SS-12v	14	1541	12.0	17.0	24.0	38.0	
M320SS-24v	55	3060	24.0	34.0	48.0	76.0	
M320SS-48v	214	5992	48.0	68.0	96.0	152.0	
M320SS-96v	900	12200	96.0	136.0	192	304	

Insulation Resistance >100MΩ, 500VDC Megger

Class E (120°C) insulation class

Dielectric Strength 1000VAC, 50/60Hz, 1 minute

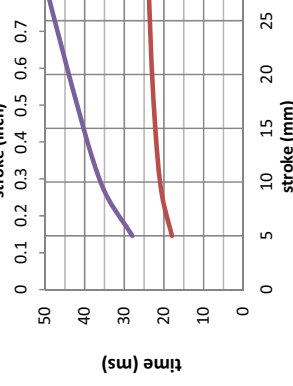

Geeplus reserves the right to change specifications without notice
www.geeplus.biz e-mail: info@geeplus.biz